


选型表&型号指南

32位APM32工业级/车规级MCU
GW系列无线MCU

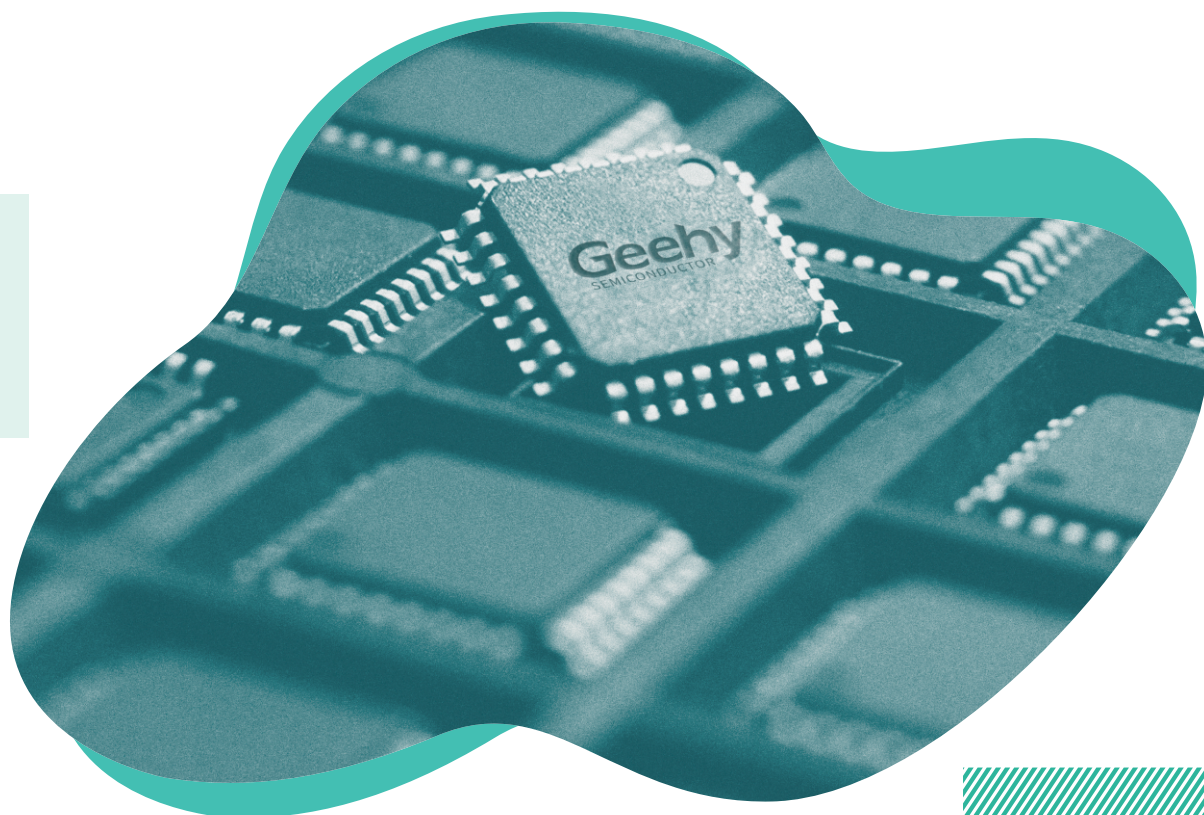

APM32系列工业级MCU — Arm® Cortex®-M0+

Part No.	Frequency(MHz)	FLASH(KB)	SRAM(KB)	SDRAM	FPU	I/Os	Vmin(V)	Vmax(V)	Timer								Analog Interface						Connectivity								Package
									GP1MR(16bit)	GP1MR(32bit)	Advanced TMR(16bit)	Basic TMR	Systick(24bit)	IWDG	WWDG	RTC	ADC 12-bit Cell	ADC 12-bit Channels	DAC 12-bit Cell	DAC 12-bit Channels	Analog Comparator	TSC (Channels)	SPI	I2S	I2C	U(S)ART	CAN	SDIO	USB Device	CEC	
APM32F091CBT6	48	128	32	0	0	38	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	24	2	2	2	6	1	0	0	1	LQFP48	
APM32F091CBU6	48	128	32	0	0	38	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	24	2	2	2	6	1	0	0	1	QFN48	
APM32F091CCT6	48	256	32	0	0	38	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	24	2	2	2	6	1	0	0	1	LQFP48	
APM32F091CCU6	48	256	32	0	0	38	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	24	2	2	2	6	1	0	0	1	QFN48	
APM32F091RBT6	48	128	32	0	0	52	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	8	1	0	0	1	LQFP64	
APM32F091RCT6	48	256	32	0	0	52	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	8	1	0	0	1	LQFP64	
APM32F091VBT6	48	128	32	0	0	88	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	8	1	0	0	1	LQFP100	
APM32F091VCT6	48	256	32	0	0	88	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	8	1	0	0	1	LQFP100	
APM32F072VBT6	48	128	16	0	0	87	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	4	1	0	1	1	LQFP100	
APM32F072V8T6	48	64	16	0	0	87	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	4	1	0	1	1	LQFP100	
APM32F072RBT6	48	128	16	0	0	51	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	18	2	2	2	4	1	0	1	1	LQFP64	
APM32F072R8T6	48	64	16	0	0	51	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	18	2	2	2	4	1	0	1	1	LQFP64	
APM32F072CBU6	48	128	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	1	0	1	1	QFN48	
APM32F072C8U6	48	64	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	1	0	1	1	QFN48	
APM32F072CBT6	48	128	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	1	0	1	1	LQFP48	
APM32F072CBT7	48	128	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	1	0	1	1	LQFP48	
APM32F072C8T6	48	64	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	1	0	1	1	LQFP48	
APM32F071V8T6	48	64	16	0	0	87	2	3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	2	2	2	4	0	0	0	1	LQFP100	
APM32F071CBU6	48	128	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	0	0	0	1	QFN48	
APM32F071CBT6	48	128	16	0	0	37	2	3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	2	2	2	4	0	0	0	1	LQFP48	
APM32F070RBT6	48	128	16	0	0	51	2.4	3.6	5	0	1	2	1	1	1	1	16	0	0	0	0	2	0	2	4	0	0	1	0	LQFP64	
APM32F070CBT6	48	128	16	0	0	37	2.4	3.6	5	0	1	2	1	1	1	1	10	0	0	0	0	2	0	2	4	0	0	1	0	LQFP48	
APM32F051K6T6	48	32	8	0	0	25	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	1	1	1	2	0	0	0	1	LQFP32	
APM32F051K6U6	48	32	8	0	0	27	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	1	1	1	2	0	0	0	1	QFN32	
APM32F051K8T6	48	64	8	0	0	25	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	1	1	1	2	0	0	0	1	LQFP32	
APM32F051K8U6	48	64	8	0	0	27	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	1	1	1	2	0	0	0	1	QFN32	
APM32F051C6T6	48	32	8	0	0	39	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	1	1	1	2	0	0	0	1	LQFP48	
APM32F051C6U6	48	32	8	0	0	39	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	1	1	1	2	0	0	0	1	QFN48	
APM32F051C8T6	48	64	8	0	0	39	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	2	1	2	2	0	0	0	1	LQFP48	
APM32F051C8U6	48	64	8	0	0	39	2	3.6	5	1	1	1	1	1	1	1	10	1	1	2	18	2	1	2	2	0	0	0	1	QFN48	
APM32F051R6T6	48	32	8	0	0	55	2	3.6	5	1	1	1	1	1	1	1	16	1	1	2	18	2	1	2	2	0	0	0	1	LQFP64	
APM32F051R8T6	48	64	8	0	0	55	2	3.6	5	1	1	1	1	1	1	1	16	1	1	2	18	2	1	2	2	0	0	0	1	LQFP64	
APM32F030F6P6	48	32	4	0	0	16	2	3.6	4	0	1	0	1	1	1	1	8	0	0	0	0	1	0	1	1	0	0	0	0	TSSOP20	
APM32F030K6T6	48	32	4	0	0	26	2	3.6	4	0	1	0	1	1	1	1	10	0	0	0	0	1	0	1	1	0	0	0	0	LQFP32	
APM32F030K6T7	48	32	4	0	0	26	2	3.6	4	0	1	0	1	1	1	1	10	0	0	0	0	1	0	1	1	0	0	0	0	LQFP32	
APM32F030K6U6	48	32	4	0	0	26	2	3.6	4	0	1	0	1	1	1	1	10	0	0	0	0	1	0	1	1	0	0	0	0	QFN32	
APM32F030K8T6	48	64	8	0	0	26	2	3.6	4	0	1	0	1	1	1	1	10	0	0	0	0	1	0	1	1	0	0	0	0	LQFP32	
APM32F030C6T6	48	32	4	0	0	39	2	3.6	4	0	1	0	1	1	1	1	10	0	0	0	0	1	0	1	1	0	0	0	0	LQFP48	
APM32F030C8T6	48	64	8	0	0	39	2	3.6	5	0	1	1	1	1	1	1	10	0	0	0	0	2	0	2	2	0	0	0	0	LQFP48	
APM32F030R8T6	48	64	8	0	0	55	2	3.6	5	0	1	1	1	1	1	1	16	0	0	0	0	2	0	2	2	0	0	0	0	LQFP64	
APM32F030CCT6	48	256	32	0	0	37	2	3.6	5	0	1	2	1	1	1	1	10	0	0	0	0	2	0	2	6	0	0	0	0	LQFP48	
APM32F030RCT6	48	256	32	0	0	51	2	3.6	5	0	1	2	1	1	1	1	16	0	0	0	0	2	0	2	6	0	0	0	0	LQFP64	
APM32F003F4P6	48	16	2	0	0	16	2	5.5	1	0	2	1	1	1	1	0	1	8	0	0	0	0	1	0	1	3	0	0	0	0	TSSOP20
APM32F003F6P6	48	32	4	0	0	16	2	5.5	1	0	2	1	1	1	1	0	1	8	0	0	0	0	1	0	1	3	0	0	0	0	TSSOP20
APM32F003F4U6	48	16	2	0	0	16	2	5.5	1	0	2	1	1	1	1	0	1	8	0	0	0	0	1	0	1	3	0	0	0	0	QFN20
APM32F003F6U6	48	32	4	0	0	16	2	5.5	1	0	2	1	1	1	1	0	1	8	0	0	0	0	1	0	1	3	0	0	0	0	QFN20
APM32F003F4M6	48	16	2	0	0	16	2	5.5	1	0	2	1	1	1	1	0	1	8	0	0	0	0	1	0	1	3	0	0	0	0	SOP20
APM32F003F6M6	48	32	4	0	0	16	2	5.5	1	0	2	1	1	1	1	0	1	8	0	0	0	0	1	0	1	3	0	0	0	0	SOP20
APM32F003F6P7	48	32	4	0	0	16	2	5.5																							

APM32系列工业级MCU — Arm® Cortex®-M3

Part No.	Frequency(MHz)	FLASH(KB)	SRAM(Kb)	SDRAM	FPU	I/Os	Vmin(V)	Vmax(V)	Timer								Analog Interface						Connectivity										Package
									GMTMR(16bit)	GMTMR(32bit)	Advanced TMR(16bit)	Basic TMR	Systick(24bit)	IWDG	WWDG	RTC	ADC 12-bit Cell	ADC 12-bit Channels	DAC 12-bit Cell	DAC 12-bit Channels	Analog Comparator	EMMC	SPI	I2S	I2C	U/S/ART	CAN	SDIO	USB Device	CEC	USB OTG_FS	Ethernet	
APM32E103CCU6	120	256	64	0	1	37	2	3.6	4	0	1	2	1	1	1	1	2	10	2	2	0	0	3	2	2	3	2	0	1	0	0	0	QFN48
APM32E103CEU6	120	512	128	0	1	37	2	3.6	4	0	1	2	1	1	1	1	2	10	2	2	0	0	3	2	2	3	2	0	1	0	0	0	QFN48
APM32E103CCT6	120	256	64	0	1	37	2	3.6	4	0	1	2	1	1	1	1	2	10	2	2	0	0	3	2	2	3	2	0	1	0	0	0	LQFP48
APM32E103CET6	120	512	128	0	1	37	2	3.6	4	0	1	2	1	1	1	1	2	10	2	2	0	0	3	2	2	3	2	0	1	0	0	0	LQFP48
APM32E103RCT6	120	256	64	0	1	51	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	0	3	2	2	3+2	2	1	1	0	0	0	LQFP64
APM32E103RET6	120	512	128	0	1	51	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	0	3	2	2	3+2	2	1	1	0	0	0	LQFP64
APM32E103VCT6	120	256	64	0	1	80	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	1	3	2	2	3+2	2	1	1	0	0	0	LQFP100
APM32E103VET6	120	512	128	0	1	80	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	1	3	2	2	3+2	2	1	1	0	0	0	LQFP100
APM32E103ZCT6	120	256	64	1	1	112	2	3.6	4	0	2	2	1	1	1	1	3	21	2	2	0	1	3	2	2	3+2	2	1	1	0	0	0	LQFP144
APM32E103ZET6	120	512	128	1	1	112	2	3.6	4	0	2	2	1	1	1	1	3	21	2	2	0	1	3	2	2	3+2	2	1	1	0	0	0	LQFP144
APM32S103TBU6	96	128	36	0	1	26	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	2	0	1	0	0	0	QFN36
APM32S103C8T6	96	64	36	0	1	37	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	2	0	2	3	2	0	1	0	0	0	LQFP48
APM32S103CBT6	96	128	36	0	1	37	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	2	0	2	3	2	0	1	0	0	0	LQFP48
APM32S103RBT6	96	128	36	0	1	51	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	2	0	1	0	0	0	LQFP64
APM32S103VBT6	96	128	36	0	1	80	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	2	0	1	0	0	0	LQFP100
APM32F103T4U6	96	16	6	0	1	26	2	3.6	2	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	QFN36
APM32F103T6U6	96	32	10	0	1	26	2	3.6	2	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	QFN36
APM32F103T8U6	96	64	20	0	1	26	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	QFN36
APM32F103TBU6	96	128	20	0	1	26	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	QFN36
APM32F103TBU7	96	128	20	0	1	26	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	QFN36
APM32F103C4T6	96	16	6	0	1	37	2	3.6	2	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	LQFP48
APM32F103C6T6	96	32	10	0	1	37	2	3.6	2	0	1	0	1	1	1	1	2	10	0	0	0	0	1	0	1	2	1	0	1	0	0	0	LQFP48
APM32F103C8T6	96	64	20	0	1	37	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP48
APM32F103CBT6	96	128	20	0	1	37	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP48
APM32F103CBT7	96	128	20	0	1	37	2	3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP48
APM32F103R4T6	96	16	6	0	1	51	2	3.6	2	0	1	0	1	1	1	1	2	16	0	0	0	0	1	0	1	2	1	0	1	0	0	0	LQFP64
APM32F103R6T6	96	32	10	0	1	51	2	3.6	2	0	1	0	1	1	1	1	2	16	0	0	0	0	1	0	1	2	1	0	1	0	0	0	LQFP64
APM32F103R8T6	96	64	20	0	1	51	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP64
APM32F103RBT6	96	128	20	0	1	51	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP64
APM32F103RBT7	96	128	20	0	1	51	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP64
APM32F103V8T6	96	64	20	0	1	80	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP100
APM32F103VBT6	96	128	20	0	1	80	2	3.6	3	0	1	0	1	1	1	1	2	16	0	0	0	0	2	0	2	3	1	0	1	0	0	0	LQFP100
APM32F103CCT6	96	256	64	0	0	37	2	3.6	4	0	1	1	1	1	1	1	2	10	2	2	0	0	3	2	2	3	2	0	1	0	0	0	LQFP48
APM32F103RCT6	96	256	64	0	0	51	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	0	3	2	2	3+2	2	1	1	0	0	0	LQFP64
APM32F103VCT6	96	256	64	0	0	80	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	1	3	2	2	3+2	2	1	1	0	0	0	LQFP100
APM32F103RDT6	96	384	64	0	1	51	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	0	3	2	2	3+2	1	1	1	0	0	0	LQFP64
APM32F103RET6	96	512	128	0	1	51	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	0	3	2	2	3+2	1	1	1	0	0	0	LQFP64
APM32F103VDT6	96	384	64	0	1	80	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	1	3	2	2	3+2	1	1	1	0	0	0	LQFP100
APM32F103VET6	96	512	128	0	1	80	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	1	3	2	2	3+2	1	1	1	0	0	0	LQFP100
APM32F103VET7	96	512	128	0	1	80	2	3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	1	3	2	2	3+2	1	1	1	0	0	0	LQFP100
APM32F103ZDT6	96	384	64	1	1	112	2	3.6	4	0	2	2	1	1	1	1	3	21	2	2	0	1	3	2	2	3+2	1	1	1	0	0	0	LQFP144
APM32F103ZET6	96	512	128	1	1	112	2	3.6	4	0	2	2	1	1	1	1	3	21	2	2	0	1	3	2	2	3+2	1	1	1				

APM32系列工业级MCU — Arm® Cortex®-M4

Part No.	Frequency(MHz)	FLASH(KB)	SRAM(KB)	SDRAM	FPU	I/O	Voltage	Timer							Analog Interface				Connectivity								Security			Package		
								GP1MR(16bit)	GP1MR(32bit)	Advanced TMR(16bit)	Basic TMR	Systick	IWDG	WWDG	RTC	ADC 12-bit Cell	ADC 12-bit Channels	DAC 12-bit Channels	EMMC	SPI	I2S	I2C	USART	CAN	SDIO	USB OTG_FS	USB OTG_HS	DCI	Ethernet		RNG	AES/DES/ TDES
APM32F4071GT6	168	1024	192+4	1	1	140	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	0	1	LQFP176
APM32F4071ET6	168	512	192+4	1	1	140	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	0	1	LQFP176
APM32F407ZGT6	168	1024	192+4	0	1	114	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	0	1	LQFP144
APM32F407ZET6	168	512	192+4	0	1	114	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	0	1	LQFP144
APM32F407VGT6	168	1024	192+4	0	1	82	1.8~3.6	8	2	2	2	1	1	1	3	16	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	0	1	LQFP100
APM32F407VET6	168	512	192+4	0	1	82	1.8~3.6	8	2	2	2	1	1	1	3	16	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	0	1	LQFP100
APM32F407RGT6	168	1024	192+4	0	1	51	1.8~3.6	8	2	2	2	1	1	1	3	16	2	0	3	2	3	4+2	2	1	1	1+1	0	0	1	0	1	LQFP64
APM32F407RET6	168	512	192+4	0	1	51	1.8~3.6	8	2	2	2	1	1	1	3	16	2	0	3	2	3	4+2	2	1	1	1+1	0	0	1	0	1	LQFP64
APM32F4171GT6	168	1024	192+4	1	1	140	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	1	1	LQFP176
APM32F417ZGT6	168	1024	192+4	0	1	114	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	1	1	LQFP144
APM32F417VET6	168	512	192+4	0	1	82	1.8~3.6	8	2	2	2	1	1	1	3	16	2	1	3	2	3	4+2	2	1	1	1+1	1	1	1	1	1	LQFP100
APM32F405ZGT6	168	1024	192+4	0	1	114	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	0	0	1	0	0	LQFP144
APM32F405VGT6	168	1024	192+4	0	1	82	1.8~3.6	8	2	2	2	1	1	1	3	16	2	1	3	2	3	4+2	2	1	1	1+1	0	0	1	0	0	LQFP100
APM32F405RGT6	168	1024	192+4	0	1	51	1.8~3.6	8	2	2	2	1	1	1	3	16	2	0	3	2	3	4+2	2	1	1	1+1	0	0	1	0	0	LQFP64
APM32F415ZGT6	168	1024	192+4	0	1	114	1.8~3.6	8	2	2	2	1	1	1	3	24	2	1	3	2	3	4+2	2	1	1	1+1	0	0	1	1	1	LQFP144
APM32F415VGT6	168	1024	192+4	0	1	82	1.8~3.6	8	2	2	2	1	1	1	3	16	2	1	3	2	3	4+2	2	1	1	1+1	0	0	1	1	1	LQFP100
APM32F415RGT6	168	1024	192+4	0	1	51	1.8~3.6	8	2	2	2	1	1	1	3	16	2	0	3	2	3	4+2	2	1	1	1+1	0	0	1	1	1	LQFP64


APM32系列车规级MCU

Part No.	Core	Frequency (MHz)	FLASH(KB)	SRAM(KB)	SDRAM	FPU	I/Os	Voltage	Timer							Analog Interface					Connectivity										Security			Package							
									GP1MR(16bit)	GP1MR(32bit)	Advanced TMR(16bit)	Basic TMR	Systick(24bit)	IWDG	WWDG	RTC	ADC 12-bit Cell	ADC 12-bit Channels	DAC 12-bit Cell	DAC 12-bit Channels	Analog Comparator	TSC (Channels)	EMMC	SPI	I2S	I2C	U(S)ART	CAN	SDIO	USB Device	CEC	USB OTG_FS	USB OTG_HS		DCI	Ethernet	RNG	AES/DES/IDES	BN/SM3/SM4		
APM32F072RBT7	Cortex-M0+	48	128	16	0	0	51	2~3.6	5	1	1	2	1	1	1	1	16	1	2	2	18	-	-	2	2	2	4	1	0	1	1	-	-	-	-	-	-	LQFP64			
APM32F072CBT7	Cortex-M0+	48	128	16	0	0	37	2~3.6	5	1	1	2	1	1	1	1	10	1	2	2	17	-	-	2	2	2	4	1	0	1	1	1	-	-	-	-	-	-	LQFP48		
APM32A091RCT7	Cortex-M0+	48	256	32	0	0	52	2~3.6	5	1	1	2	1	1	1	1	16	1	2	2	24	-	-	2	2	2	8	1	0	0	1	-	-	-	-	-	-	-	LQFP64		
APM32F103RCT7	Cortex-M3	96	256	64	0	0	51	2~3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	-	0	3	2	2	3+2	2	1	1	0	0	-	-	-	-	-	-	-	LQFP64	
APM32A103VET7	Cortex-M3	120	512	128	0	1	80	2~3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	-	1	3	2	2	3+2	2	1	1	0	0	-	-	-	-	-	-	-	LQFP100	
APM32A103RET7	Cortex-M3	96	512	128	0	1	51	2~3.6	4	0	2	2	1	1	1	1	3	16	2	2	0	-	0	3	2	2	3+2	1	1	1	0	0	-	-	-	-	-	-	-	LQFP64	
APM32A103CBT7	Cortex-M3	96	128	36	0	1	37	2~3.6	3	0	1	0	1	1	1	1	2	10	0	0	0	-	0	2	0	2	3	2	0	1	0	0	-	-	-	-	-	-	-	-	LQFP48
APM32A407VGT7	Cortex-M4	168	1024	192+4	0	1	82	1.8~3.6	8	2	2	2	2	1	1	1	3	16	-	-	-	-	1	3	2	3	4+2	2	1	-	-	1	-	1	1	1	0	1	LQFP100		
APM32A407ZGT7	Cortex-M4	168	1024	192+4	0	1	114	1.8~3.6	8	2	2	2	2	1	1	1	3	24	-	2	-	-	1	3	2	3	4+2	2	1	-	-	1	-	1	1	1	0	1	LQFP144		

GW系列无线MCU — GW8811-BLE4.2/GW3323-BLE5.2

Part No.	CPU	Frequency (MHz)	FLASH (KB)	SRAM (KB)	I/Os	Vmin(V)	Vmax(V)	Max. TX Power (dbm)	RX Sensitivity (dbm)	TX Current (mA@0dbm)	RX Current (mA@0dbm)	Sleep Mode Current (uA)	Deep Sleep Mode Current (uA)	Operating Temperature (°C, Tj)	Timer				Analog Interface		Connectivity										Package
															Low Speed TM(32bit)	HighSpeed TM(16bit)	WDT(16bit)	RTC	GPADC 10bit Cell	GPADC 10bit Channels	SPI(Master)	I2C(Master)	USART	PWM	Quadrature Decoder	ISO7816	Infrared Emitting & Receiving	Keyscan Decoder (Rows & Columns)	AES Encryption Engine		
GW8811KEU6	Cortex-M0	64	512	24	21	1.8	3.6	+4	-94	4.8	2.8	2.7	1	-40~+85	4	1	1	1	1	4+1	2	2	2	6	Yes	Yes	Yes	8 x 20	128 bit	QFN32	
GW8811CEU6	Cortex-M0	64	512	32	32	1.8	3.6	+4	-94	4.8	2.8	2.7	1	-40~+85	4	1	1	1	1	8+1	2	2	2	6	Yes	Yes	Yes	8 x 20	128 bit	QFN48	
GW3323HBU6	RISC-V 32	160	1024	256	24	3	4.5	+9	-94	18.7	28	500	4	-40~+85	6	0	1	1	1	16	2	1	3	3	0	0	0	0	0	QFN40	

极海产品选型指南

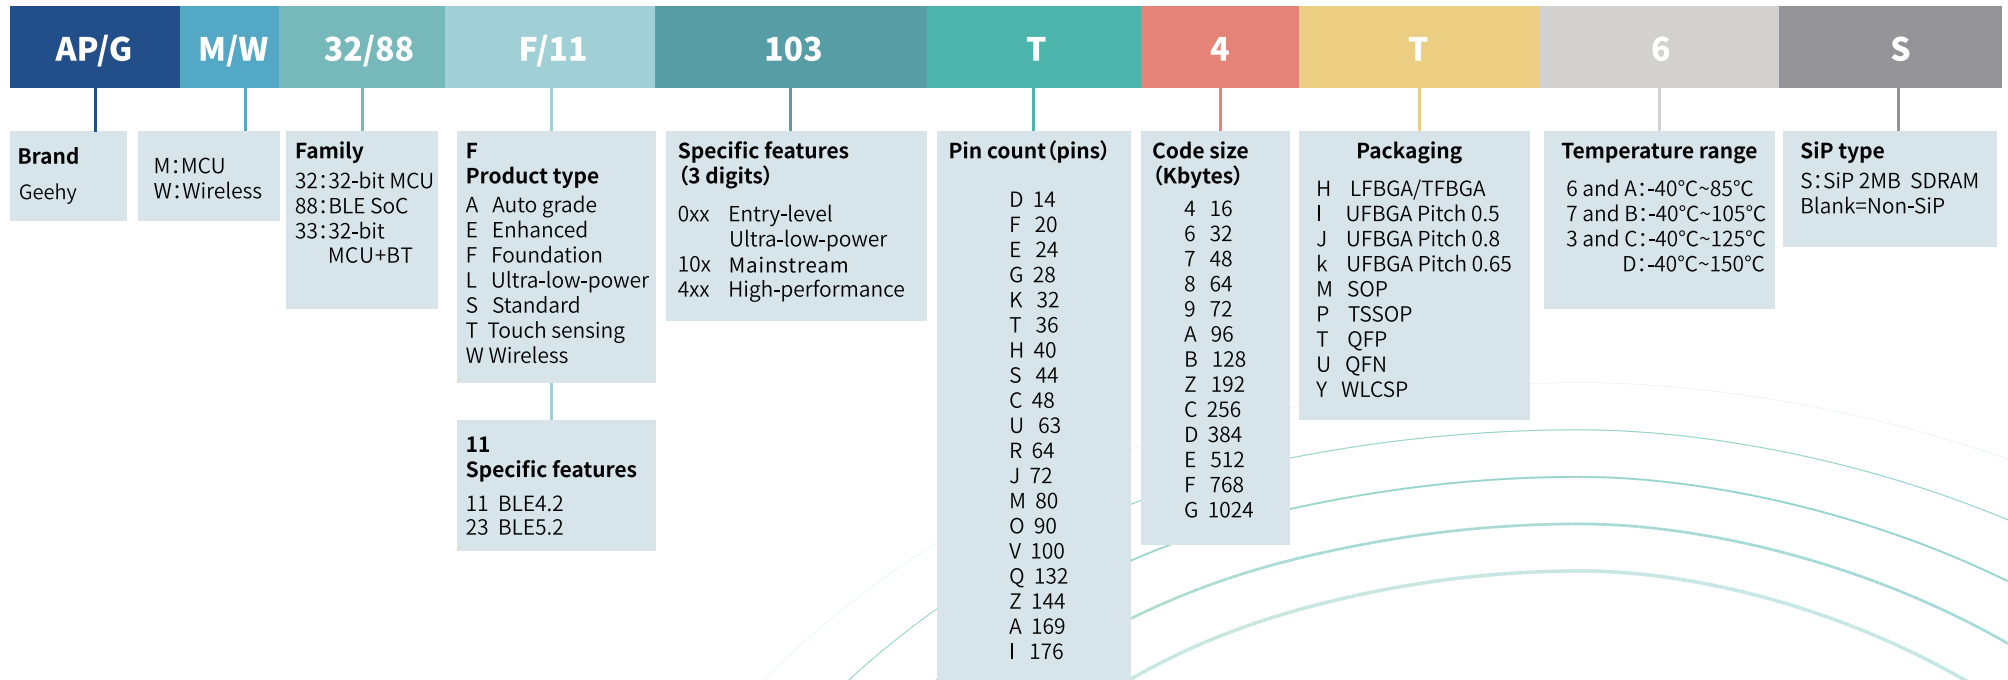

TECHNOLOGY INSPIRED.

技术赋能

让灵感成为现实



珠海极海半导体有限公司
GEEHY SEMICONDUCTOR CO.,LTD.

☎ 0756 6299999

✉ info@geehy.com

🌐 www.geehy.com

极海深圳 0755 26923525

上海办事处 021 64260716

广州办事处 020 22281152

极海成都 028 63108518

Copyright© Geehy Semiconductor - Oct.2022. The information contained herein is subject to change without notice. Geehy shall not be liable for technical or editorial errors or omissions contained herein. Photographed products may not always match the description. All brand names & trademarks are the properties of their respective holders and used for descriptive purposes only.



极海技术社区



极海微信公众号